

# 8.4" 2nd Display Monitor



## Features



1. Ideally for integration to POS system as 2nd display
2. VESA wall mount 75 \* 75 mm standard (recommend M4-Max.depth 8mm screw)



3. LED backlight -Low power consumption only 6W

## Optional



1. Color Black or White



2. 4W Resistive touch (Model: OT84T)



3. Round or Rectangular stand base



4. Wall mount bracket


## Specification

Model	8.4" 2nd display series
Display Size	8.4"
Active Area	170.4 * 127.8 mm
Optimal Resolution	800 * 600
Brightness	250 nits (typ)
Contrast Ratio	600 : 1
Response Time	25 ms (typ)
Viewing Angle(L/R/U/D)	70 / 70 / 50 / 70
Input Video Connector	D-Sub 15 pins
Power Consumption	6W (LED backlight)
Input Frequency	Horizontal : 31.5-60.2 kHz Vertical : 56.3Hz~75Hz
Power Supply	DC 12V +/- 10%
Temperature	Operating : 0°C~40°C Storage : -10°C~50°C
Humidity	Operating : 20%~80% Storage : 10%~90%
Weight	680g (Net)
Physical Dimension	199.7 * 165 * 33.7 mm
Approvals	CE / FCC / CCC / BSMI
Wall Mount	VESA 75 * 75 mm M4-Max.depth 8mm screw
Warranty	3 years
<b>Optional Items</b>	
Color	Black or White
Touch	4W Resistive local touch (OT84T)
Stand Base	Rectangle or Oval shape
Wall Mount	Bracket

Product specifications subject to change without prior notice

Made in Taiwan ROC

### Front & Back View

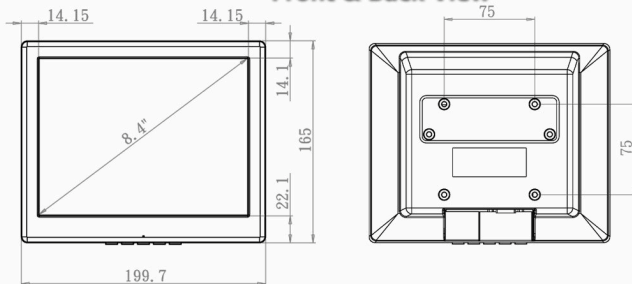

### Side View

